




N00 VH-F

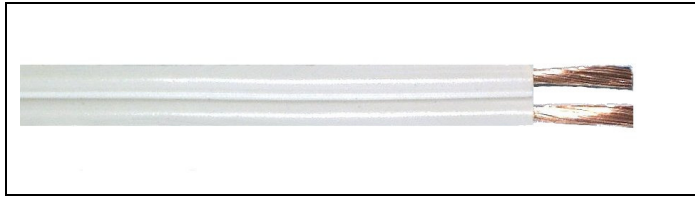

Low voltage twin wire

Max conductor temp. : 70°C
Rated voltage, Um : 50V

Cenelec designation : N00VH-F

Application

Flexible PVC-insulated twin-wire for indoor use.
Rated voltage: 50V

STANDARDS APPLIED

Flame retardancy : IEC 60332-1
Halogenfree : No

CONSTRUCTION

Conductor		Multi stranded copper
Insulation		PVC
Colour		White
Marking		Longitudinal ridge on one of the conductors.
Mode of packing		Reel

DIMENSIONS

Rev.4.

No. of cores and conductor area mm ²	Cond.-type *)	El. No.	Art. No.	Outer dimensions appr. mm	Weight appr. Kg/km	Delivery length m
		Snelle	Snelle			Snelle
2x1,5	MR	1070010	100254	3,1/6,3	44	100/50
2x2,5	MR	1070011	100265	3,6/7,6	65	100/50
2x6	MR	1070013	100296	5,5/12,0	136	50

*) MR = Multi stranded round

Mode of packing and length can be changed.
Not all dimensions are in stock.