




H07RN-F

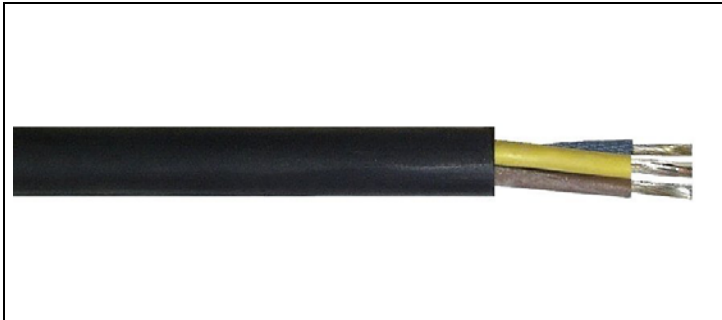

Drakaflex

Flexible rubber cable

Max conductor temp : 60°C
Rated voltage Uo/U : 450/750V

Cenelec designation : H07RN-F

Application

Tough oil resistant rubber cable certified for indoor and outdoor use. Also certified for marine appliances where flexible rubber cable is permitted. This cable is flexible even when the temperature is very low.

Example: To portable engines, apparatus, cranes, machines, extension lead etc.

STANDARDS APPLIED

Construction : CENELEC HD 22.4
IEC 60245-4

Flame retardancy : IEC 60332-1

Halogen-free : No

APPROVALS

<HAR>

CE-marking, acc. to LVD.

CONSTRUCTION

Conductor		Multi stranded, tinned copper
Insulation		EPDM rubber
Outer sheath		Oil and weather resistant rubber
Marking		Marking on outer sheath
Colour		Black
Mode of packing		Coil, drum or box

DIMENSIONS

Rev.6.

Conductor area mm ² *)	Cond.-type **)	EI. No.		EAN No.		Outer diameter appr. mm	Weight appr. Kg/km	Delivery length m	
		Coil/Box	Drum	Coil/Box 702152+	Drum 702152+			Coil/Box	Drum
3G 1,5	MR	1076173	1076213	1050186	1050162	10	140	50	500
3G 2,5	MR	1076174	1076214	1050438	1050414	12	210	50	500
3G 4	MR		1076215		1050599	12	210		500

*) G = One of the conductors is Yellow/Green, for earth.

***)MR = Multistranded round.



H07RN-F

DIMENSIONS

Conductor area mm ² *)	Cond. - type **)	EI. No.		EAN No.		Outer diameter appr. mm	Weight appr. Kg/km	Delivery length m ***)	
		Coil/Box	Drum	Coil/Box 702152+	Drum 702152+			Coil/Box	Drum
4G 1,5	MR	1076183	1076223	1050230	1050216	11	170	50	500
4G 1,5	MR		1076220		1050223	11	170		1000
4G 2,5	MR	1076184	1076224	1050483	1050469	13	250	40	500
4G 2,5	MR		1076221		1050476	13	250		1000
4G 4	MR		1076225		1050612	15	350		500
4G 6	MR		1076226		1050766	17	490		500
4G 10	MR		1076227		1050858	24	840		500
4G 16	MR		1076228		1050957	26	1150		500
4G 25	MR		1076229		1051053	32	1700		250
4G 35	MR		1076230		1051169	37	2300		250
4G 50	MR		1076231		1051206	43	3200		250
4G 70	MR		1076232		1051251	48	4200		250
4G 95	MR		1076233		1051305	55	5600		250
5G 1,5	MR	1076143	1076243	1050254	1050261	12	210	B50	500
5G 2,5	MR	1076144	1076244	1050506	1050513	14	300	B50	500
5G 4	MR		1076245		1051572	17	440		500
5G 6	MR		1076246		1051626	19	590		500
5G 10	MR		1076247		1051633	26	1030		500
5G 16	MR		1076248		1051657	29	1450		500
5G 25	MR		1076249		1051756	35	2100		250
5G 35	MR		1076250		1051800	40	2850		250
5G 50	MR		1076251		1051855	47	4000		250
5G 95	MR		1076253		1051909	60	6900		250
7G 1,5	MR		1076263		1050315	16	350		500

*) G = One of the conductors is Yellow/Green, for earth.

**) MR = Multistranded round.

***) B50 = coil (50m) instead of Box

Mode of packing and length can be changed.
Not all dimensions are in stock.