




IFXI 500V

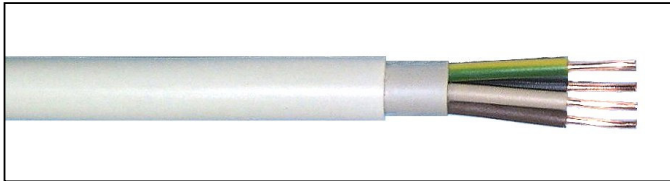

SafetyCable

Draka

Max conductor temp.: 70 °C
Rated voltage U_o/U: 300/500V
Cenelec designation: 05Z1Z1-U

Application

Halogenfree dual wall cable for fixed installation, for in-and outdoor use. Halogenfree cable is recommended used when it is important to avoid heavy smoke and corossive gases in case of a fire. National regulations for electrical installation must be followed.

STANDARDS APPLIED

Construction: SS 424 02 19-5
Flame retardancy: IEC 60332-1
Halogen-free: IEC 60754-1 og 2
Low smoke: IEC 61034

APPROVALS

SEMKO
CE-marking, acc. to LVD

CONSTRUCTION

Conductor		Solid copper
Insulation		Halogen-free polymer
Bedding		Halogen-free polymer
Outer sheath		Halogen-free polymer
Colour		White
Marking		Marking on outer sheath
Mode of packing		Drum

DIMENSIONS

No. of cores and conductor area mm ² <i>G=Yellow/Green</i>	Conductor type <i>ER=solid round</i>	Overall diameter approx. mm	Cable weight approx. kg/km	Delivery length m	Mode of packing
3G1,5	ER	9	120	500	Drum
3G2,5	ER	10,7	169	500	Drum
4G1,5	ER	10,1	142	500	Drum
5G1,5	ER	11,1	168	500	Drum
5G2,5	ER	12,8	242	500	Drum

ORDERING INFORMATION

No. of cores and conductor area mm ²	Art. No.	EAN. No.	EI. No
3G1,5	106160	7330384301497	1045890
3G2,5	106163	7330384301664	1045891
4G1,5	106161	7330384301527	1045892
5G1,5	106162	7330384301558	1045893
5G2,5	106164	7330384301602	1045894