




IX 750V

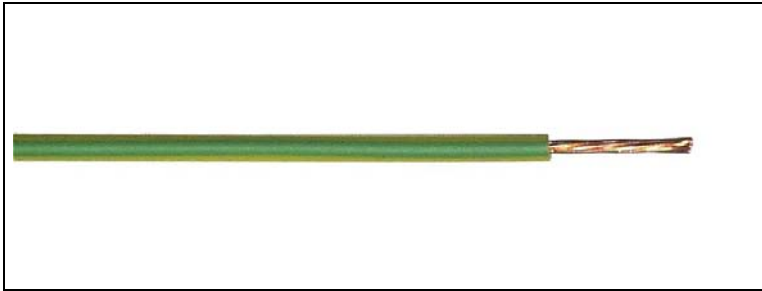

Safetycable

Halogenfree connection wire

Max conductor temp. : 70 °C
Rated voltage, Uo/U : 450/750V
Cenelec designation : N07Z1-R

STANDARDS APPLIED

Construction : NEK 591
Flame retardancy : IEC 60332-1
Halogen-free : IEC 60754-1 and 2
Low smoke : IEC 61034

APPROVALS

NEMKO
CE-marking, acc. to LVD.

Application

Thermoplastic insulated wire certified for house-wiring in conduits and as connection wire. Halogenfree cable is recommended used when it is important to avoid heavy smoke and corrosive gases in case of a fire.

National regulations for electrical installation must be followed.

CONSTRUCTION

Conductor		Stranded copper
Insulation		Halogen-free Polymer
Marking		Printed on insulation
Mode of packing		Reel or drum

DIMENSIONS

Rev.10.

Conductor area mm ²	Cond. type *)	Art. No.	El. No.		Outer diameter appr. mm	Weight pr. 1000 m appr. kg	Delivery length, m		
			Reel	Drum			Reel	Coil	Drum
Stranded cond. 2,5 black light grey blue	FR	162240	1045615		3,6	32	100		
		162242	1045616		3,6	32	100		
		162244	1045617		3,6	32	100		

*) FR = Stranded round

Mode of packing and length can be changed.
Not all dimensions are in stock