




RKK 1kV

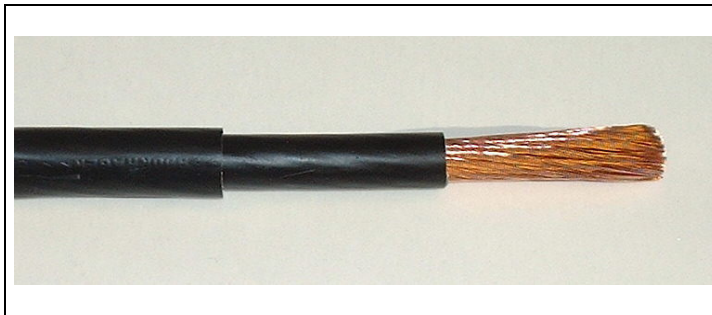

Connection wire

Multi stranded

Max conductor temp. : 70°C

Rated voltage, Uo/U : 0,6/1kV

Cenelec designation : N1VV-K

Application

Flexible dual wall insulated connection wire.
National regulations for electrical installation must be followed.

STANDARDS APPLIED

Construction : CENELEC HD 21.3
IEC 60227-3

Flame retardancy : IEC 60332-1

Halogen-free : No

APPROVALS

CE-marking, acc. to LVD

CONSTRUCTION

Conductor		Multi-stranded copper
Insulation		PVC, 1.0mm
Sheath		PVC, 1.0mm
Marking		Printed on sheath
Mode of packing		Box

DIMENSIONS

Rev.5.

Conductor area mm ²	Art. No.	Conductor type (*)	El. No. Box	Outer diameter appr. mm	Weight appr. Kg/km	Delivery length m Box
10 black	174960	MR	1050800	8,2	143	50
16 black	174961	MR	1050801	9,3	200	50

*) MR = multi stranded round

Mode of packing and length can be changed.
Not all dimensions are in stock.