


BU(c) 150/250(300)V S14 Instr. cable, Unarmoured

Fire resistant, flame retardant halogen-free instrumentation cable. Mud resistant

BU(c) 150/250(300)V MGT/EPR/EVA

NEK TS 606 CodeS14

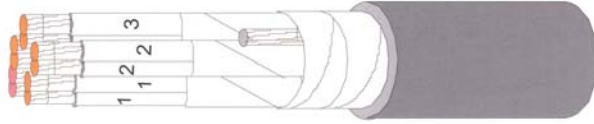

Operating temperature : 90°C
 Operating Voltage : 150/250(300)V

Standards applied

Application

Fixed installation for instrumentation, communication, control and alarm systems in both EX-(Zone 2) and safe areas, emergency and critical systems where requirement for fire resistance exists. Meets the mud resistant requirements in NEK TS 606:2009.

IEC 60092-376 (2003-05)	- Design
IEC 60228 class 2	- Conductor
IEC 60092-351	- Insulation
IEC 60092-359	- Sheath
IEC 60332-1	- Flame Retardant
IEC 60332-3-22	- Flame Retardant
IEC 60331-21	- Fire Resistant
IEC 60754-1,2	- Halogen Free
IEC 61034-1,2	- Low Smoke

Construction

	Code Letter	
Conductor		Tinned annealed stranded circular copper (STCC), IEC 60228 class 2
Insulation	B	Mica-tape + EP-rubber, IEC 60092-351 (EPR)
Pair / Triple / Quad twisting		Color coded cores twisted together and wrapped with polyester tape. Pairs/Triples are laid up collectively and screened by copper backed polyester tape with tinned copper drain wire. Pairs/triples are identified by numbered tape or by numbers printed directly on the insulated conductors.
Inner covering		No inner covering. (Additional tapes may be applied)
Armour/screen		No armour.
Outer sheath	U	Flame retardant, halogen-free and mud resistant thermoset compound, SHF2 (IEC 60092-359)
Marking text		"meter" "year" DRAKA 01 BU(c) 250V S14 8 PAIR 0,75 mm ² FLEX - FLAME IEC 60092-376 IEC 60331-21 IEC 60332-3-22
Manufacturing unit		DRAKA 01 = Draka Norsk Kabel,
Outer sheath colour		Grey or Blue

BU(c) 150/250(300)V S14 Instr. cable, Unarmoured

Core identification instrumentation cables

Pair - Black - Light Blue

Triple - Black - Light Blue - Brown

Quad - Black - Light Blue - Brown - Grey

Range and dimensions

Number of elements	No of cores in element	Cross section core, mm ²	Conductor Diameter, mm	Insulation Thickness, mm	Thickness Outer Sheath, mm	Diameter outer sheath, mm	Weight of Cable Approx. (Kg/Km)	Copper content Approx. (kg/km)
2	2	0.75	1.1	0.6	1.1	10.5 ± 0.8	150	30
4	2	0.75	1.1	0.6	1.2	12.5 ± 0.8	230	55
8	2	0.75	1.1	0.6	1.4	17 ± 0.8	420	107
12	2	0.75	1.1	0.6	1.5	19.5 ± 0.8	570	158
12	2	0.75	1.1	0.6	1.5	19.5 ± 0.8	570	158
16	2	0.75	1.1	0.6	1.6	21.5 ± 1	720	209
19	2	0.75	1.1	0.6	1.7	23 ± 1	830	247
24	2	0.75	1.1	0.6	1.8	26.5 ± 1	1040	311
2	3	0.75	1.1	0.6	1.2	12 ± 0.8	200	43
4	3	0.75	1.1	0.6	1.3	14.5 ± 0.8	320	81
8	3	0.75	1.1	0.6	1.5	19.5 ± 0.8	580	158
12	3	0.75	1.1	0.6	1.6	22.5 ± 1	790	236
16	3	0.75	1.1	0.6	1.7	24.5 ± 1	1000	313
24	3	0.75	1.1	0.6	2	30.5 ± 1.5	1460	468
2	2	1.5	1.6	0.7	1.2	13 ± 0.8	230	62
4	2	1.5	1.6	0.7	1.3	15.5 ± 0.8	360	118
8	2	1.5	1.6	0.7	1.5	21 ± 1	660	229
12	2	1.5	1.6	0.7	1.7	24.5 ± 1	940	342
16	2	1.5	1.6	0.7	1.8	26.5 ± 1	1200	452
24	2	1.5	1.6	0.7	2.1	33 ± 1.5	1770	676
2	3	1.5	1.6	0.7	1.3	15 ± 0.8	310	91
4	3	1.5	1.6	0.7	1.4	17.5 ± 0.8	500	175
8	3	1.5	1.6	0.7	1.6	23.5 ± 1	930	343
12	3	1.5	1.6	0.7	1.8	28 ± 1	1310	512
16	3	1.5	1.6	0.7	1.9	30.5 ± 1.5	1680	680
24	3	1.5	1.6	0.7	2.2	37.5 ± 1.5	2480	1016

Electrical values instrumentation cables

Type	Capacitance, approx. (nF/km)	Inductance, approx. (mH/km)	Resistance at 20°C, max. (Ohm/km)	L/R ratio, (microH/Ohm)
Unshielded pair 0,75 mm ²	100	0,67	26,3	12,7
Unshielded triple 0,75 mm ²	100	0,67	26,3	12,7
Unshielded pair 1,5 mm ²	110	0,63	12,9	24,4
Unshielded triple 1,5 mm ²	110	0,63	12,9	24,4
Unshielded pair 2,5 mm ²	125	0,59	8,02	36,8
Unshielded triple 2,5 mm ²	125	0,59	8,02	36,8

BU(c) 150/250(300)V S14 Instr. cable, Unarmoured

Ordering information

Part number	Description	Sheath Colour	Stock item	EAN No. DNK	EL No.
896806	BU(C) 250V 2PAIR 0.75mm ² S14	GREY	-	7021528968064	1064106
896818	BU(C) 250V 4PAIR 0.75mm ² S14	GREY	-	7021528968187	1064118
896830	BU(C) 250V 8PAIR 0.75mm ² S14	GREY	-	7021528968309	1064130
896836	BU(C) 250V 12PAIR 0.75mm ² S14	GREY	-	7021528968361	1064136
896837	BU(C) 250V 12PAIR 0.75mm ² S14	BLUE	-	7021528968378	-
896842	BU(C) 250V 16PAIR 0.75mm ² S14	GREY	-	7021528968422	1064142
896845	BU(C) 250V 19PAIR 0.75mm ² S14	GREY	-	7021528968453	1064145
896848	BU(C) 250V 24PAIR 0.75mm ² S14	GREY	-	7021528968484	1064148
896866	BU(C) 250V 2TRIP 0.75mm ² S14	GREY	-	7021528968668	1064166
896878	BU(C) 250V 4TRIP 0.75mm ² S14	GREY	-	7021528968781	1064178
896890	BU(C) 250V 8TRIP 0.75mm ² S14	GREY	-	7021528968903	1064190
896896	BU(C) 250V 12TRIP 0.75mm ² S14	GREY	-	7021528968965	1064196
896902	BU(C) 250V 16TRIP 0.75mm ² S14	GREY	-	7021528969023	1064203
896908	BU(C) 250V 24TRIP 0.75mm ² S14	GREY	-	7021528969085	1064208
897006	BU(C) 250V 2PAIR 1.5mm ² S14	GREY	-	7021528970067	1064306
897018	BU(C) 250V 4PAIR 1.5mm ² S14	GREY	-	7021528970180	1064318
897030	BU(C) 250V 8PAIR 1.5mm ² S14	GREY	-	7021528970302	1064330
897036	BU(C) 250V 12PAIR 1.5mm ² S14	GREY	-	7021528970364	1064336
897042	BU(C) 250V 16PAIR 1.5mm ² S14	GREY	-	7021528970425	1064342
897048	BU(C) 250V 24PAIR 1.5mm ² S14	GREY	-	7021528970487	1064348
897066	BU(C) 250V 2TRIP 1.5mm ² S14	GREY	-	7021528970661	1064366
897078	BU(C) 250V 4TRIP 1.5mm ² S14	GREY	-	7021528970784	1064378
897090	BU(C) 250V 8TRIP 1.5mm ² S14	GREY	-	7021528970906	1064390
897096	BU(C) 250V 12TRIP 1.5mm ² S14	GREY	-	7021528970968	1064396
897102	BU(C) 250V 16TRIP 1.5mm ² S14	GREY	-	7021528971026	1064402
897108	BU(C) 250V 24TRIP 1.5mm ² S14	GREY	-	7021528971088	1064408

Installation recommendations

Minimum Bending Radius during Installation	Minimum Bending Radius Fixed Installed	Maximum Tensile Load During Installation	Minimum Installation Temperature
8 x D	6 x D	50 N /mm ²	-20°C