




SuperCat Outdoor CAT 6 F-U/UTP + ALPE sheath

F-U/UTP + ALPE Installation cable

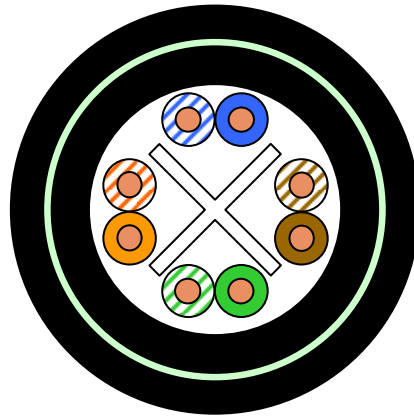

Application

Primary (Campus), Secondary (Riser), Tertiary (Horizontal)
IEEE 802.3: 10Base-T; 100Base-T; 1000Base-T;
IEEE 802.5 16 MB; ISDN; TPDDI; ATM

Standards

EIA/TIA-568-B.2-1 6/2002.
ISO/IEC 11801 2nd ed.; IEC 61156-5
EN 50173-1, EN 50288-6-1

Water penetration rating

Cable core: IEC 60794-1-2F5, methode B

Construction

Conductor	bare copper wire Ø 0.58 mm (AWG23)
Insulation	Polyethylene, Ø 1.1 mm
Twisting	2 cores to the pair
Cable lay up	4 pairs to the core non metallic cross separator (spline)
Cable core filling	Waterproof gel to prevent moisture migration. To ensure electrical properties even if wet conditions.
Sheath 1	PE, Black UV stabilized
Drain wire	Tinned drain wire under the AL tape, for easy termination of the AL Screen
Sheath 2	PE with laminated AL tape on the inside, Black UV stabilized

Mechanical properties

Minimum bending radius	Installation	15 x D
	Installed	15 x D
Temperature range	during operation	-55°C to + 60°C
	during installation	-15°C to + 50°C
Max tensile load	during operation	-
	during installation	100N



SuperCat Outdoor CAT 6 F-U/UTP + ALPE sheath

Electrical properties

at 20°C

DC loop resistance	≤ 176 Ω /km
Resistance unbalance	≤ 2%
Insulation resistance (500 V)	≥ 5000 MΩ *km
Capacitance at 800 Hz	Nom. 48 nF/km
Capacitance unbalance (pair to ground)	≤ 1500 pF/km
Characteristic impedance (1 - 100 MHz)	(100 ± 15) Ω
(100 - 250 MHz)	(100 ± 22) Ω
Nominal velocity of propagation	Approx. 67 %
Propagation delay	Nominal 535 ns/100m
Delay skew	Nominal 20 ns/100m
Test voltage (DC, 1 min)	1000 V
Core/Core	

Nominal transmission characteristics

at 20°C

F (MHz)	Attenuation (dB/100m)		NEXT (dB)		PS-NEXT *) (dB)		ACR (dB/100m)		PS-ACR (dB/100m)		ELFEXT (dB/100m)		PS-ELFEXT (dB/100m)		Return loss (dB)
	max.	Nom.	min.	nom.	min.	Nom.	Min.	Nom.	Min.	Nom.	min.	Nom.	min.	Nom.	min.
1	2.1	1.9	74	78	72	75	72.0	76.1	70.0	73.1	68	82	65	80	20
4	3.8	3.8	65	69	63	66	61.2	65.2	59.2	62.2	56	70	53	68	23
10	6.0	6.0	59	63	57	60	53.0	57.0	51.0	54.0	48	62	45	60	25
16	7.6	7.6	56	60	54	57	48.4	52.3	46.4	49.3	44	58	41	56	25
20	8.5	8.5	55	59	53	56	46.5	50.0	44.5	47.0	42	56	39	54	25
31.2	10.7	10.7	52	56	50	53	41.3	45.0	39.3	42.0	38	52	35	50	23.6
62.5	15.5	15.1	47	51	45	48	31.5	36.0	29.5	33.0	32	46	29	44	21.5
100	19.9	19.1	44	48	42	45	24.1	28.9	22.1	25.9	28	42	25	40	20.1
125	22.5	21.3	43	47	41	44	20.5	25.2	18.5	22.2	26	40	23	38	19.5
155.5	25.4	23.8	42	45	40	42	16.6	21.3	14.6	18.3	24	38	21	36	18.8
175	27.1	25.3	41	44	39	41	13.9	19.1	11.9	16.1	23	37	20	35	18.4
200	29.2	27.0	40	44	38	41	10.8	16.5	8.8	13.5	22	36	19	34	18.0
250	33.0	32.0	38	42	36	39	5.0	10.0	2.0	7.0	20	34	17	32	17.3
300		36.1		41		38		4.8		1.8		32		30	-
400		41.7		39		36		-2.7		-5.7		30		28	-

Technical Data

Description	Variant	Colour	Outer diameter (D) mm	Delivery form	Weight kg/km	DCD No.		El. No	DCN No.
SuperCat U/UTP 4P AWG23 C6 +ALPE	PE+ALPE	Black	9,5	Drum 500m	90	1014166	-00500DP	-	799646