


# Trommel – opptakskapasitet i meter.

Klaring mm	30	30	30	30	30	30	30	40	50	60	60	60	60	70	70	80	90	100	Klaring mm
Trml. nr.	K5	K6	K65	K8	K9	K10	K10A	K11	K12	K14	K14A	K16	K16A	K18	K20	K22	K24	K26	Trml. nr.
Kabel diam.																			Kabel diam.
6	1000	2000																	6
8	560	1120	1295																8
10	360	720	850	1470															10
12	250	500	565	1020	1440														12
14	185	370	425	770	1105	1520													14
16		280		550	825	1160		1335											16
18				450	620	920	570	1010	1510										18
20				375	510	745	460	850	1100	1565	1065								20
22					420	615	380	700	885	1325	880	1645							22
24					340	515	320	580	830	1075	740	1380	870						24
26						440	270	470	685	905	630	1175	740	1485					26
28						380	235	440	555	745	540	985	635	1255	1685				28
30						330	205	345	525	705	470	930	555	1045	1375				30
32							180	330	410	560	415	755	490	980	1300	1565			32
34							160		395	545	370	735	430	825	1105	1350			34
36							140		370	420	330	580	385	765	1035	1265			36
38							130		285	405	295	560	345	630	860	1070	1570		38
40							115			390	265	445	310	605	830	1035	1355	2060	40
42									300	240	430	285	485	640	820	1255	1870		42
44									285	220	410	260	460	620	790	1065	1700		44
46										200	390	235	440	595	760	1025	1560		46
48										185	315	215	445	595	635	895	1430		48
50										170	300	200	340	460	605	855	1320		50
52										160	285	185	320	440	580	820	1220		52
54										145	285	170	320	420	550	665	1130		54
56										135		160	300	420	445	670	1050		56
58										125		150	300	420	425	635	980		58
60										120		140	215	400	425	640	915		60
62												130	215	310	400	500	860		62
64												120		290	405	500	805		64
66												115		290	380	475	755		66
68												110		275	295	475	715		68
70												100		275	275	445	675		70
72														255	275	360	635		72
74														260	275	360	600		74
76															255	335	570		76
78															255	335	540		78

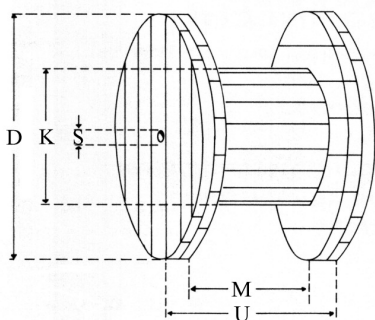

# Trommel – dimensjoner og vekter

Trommel nr.	Vangediameter D mm	Kjerne-diameter K mm	Senter-diameter S mm	Innvendig bredde M mm	Utvendig bredde U mm	Maks. kabelvekt kg.	Vekt uten forskaling ca. kg	Vekt med forskaling ca. kg
K5	500	200	75	300	380	200	13	18
K6	600	250	75	400	480	300	15	26
K65	650	250	75	400	480	300	17	28
K7	700	325	75	500	576	400	20	34
K8	800	375	75	500	604	500	24	40
K9	900	425	75	550	654	600	31	50
K10	1000	500	105	600	704	800	55	80
K10A	1000	700	105	600	750	800	64	105
K11	1100	575	105	650	754	850	62	101
K12	1200	675	105	850	982	1500	80	135
K14	1400	800	105	850	982	2000	105	170
K14A	1400	1000	105	850	1035	2000	119	186
K16	1600	950	105	850	1010	2500	250	330
K16A	1600	1200	105	850	1065	2500	273	351
K18	1800	1100	130	850	1010	3000	315	400
K20	2000	1300	130	1000	1160	3500	410	570
K22	2200	1400	130	1000	1160	4500	480	660
K24	2400	1400	130	1000	1184	5000	630	870
K26	2600	1500	130	1200	1500	10000	900	1170